



Technical Information Honda & Acura 28610-RAY-003

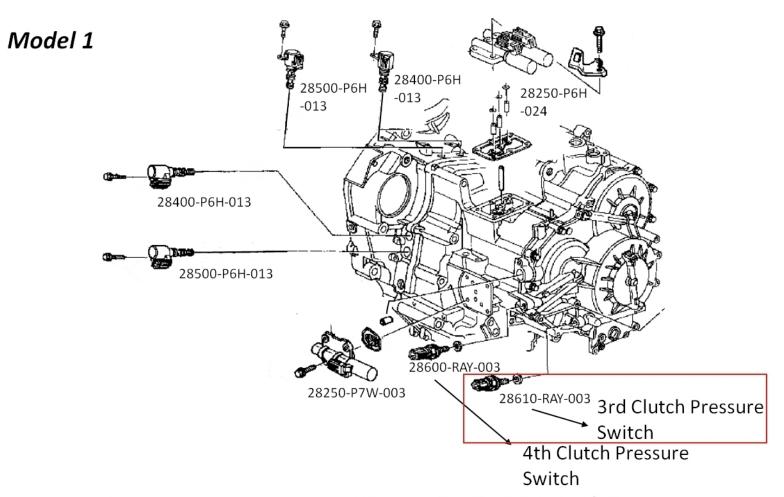

3rd Clutch Transmission Fluid Pressure Switch Replacement


- Lift the vehicle up on a lift or apply the parking brake, block rear wheels, and raise the front of the vehicle. Make sure it is securely supported.
- 2. Remove the splash shield.
- Disconnect the ATF temperature sensor connector (A), and remove it from its bracket.



- Remove ATF temperature sensor harness clamp bolts (B).
- Disconnect the connector from the 3rd clutch transmission fluid pressure switch (C).
- Remove the switch, then install a new one with a new sealing washer (D). Do not tighten the switch using the plastic connector.
- Check the connector for water, corrosion, dust, and oil, then connect the connector securely.
- Install ATF temperature sensor harness clamp bolt, and connect the ATF temperature sensor connector.
- 9. Install the splash shield.


Application:	
5AT	
Honda Accord V6	2003-2007
Honda Pilot	2005
Acura TL	2004-2006

Model 2

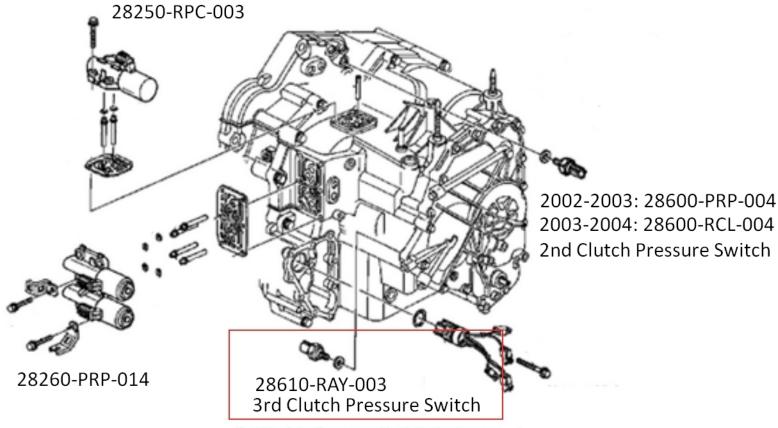

3rd Clutch Pressure Switch Replacement

1. Disconnect the connector from the 3rd clutch pressure switch (A).



- 2. Replace the 3rd clutch pressure switch ,then install a new one with a new sealing washer (B). Tighten the switch on the metal part, not the plastic part.
- 3. Reconnect the connector, making sure there is no water, oil, dust, or foreign particles inside it.

Application:

4AT

Honda CR-V

2002-2004

